

CN 200N1

AUDIO TRANSFORMER ASSEMBLY FOR LF CONDUCTED IMMUNITY TESTING



FOR TESTS ACCORDING TO ...

- > AIRBUS
- > BMW GS 95023
- > Chrysler CS-11809 (2009)
- > DaimlerChrysler DC-10615
- > DO 160 Section 16
- > DO 160 Section 18
- > Ford FMC1278
- > GLloyd VI-7-2
- > ISO 11452-10
- > Jaguar EMC-CS-2010JLR V1.1 (2011-01)
- > Jaguar JLR-EMC-CS V1.0 Amd 4
- > LV 123
- > MIL STD 461 G CS 101
- > MIL STD 461 G CS 109
- > MIL-STD-704
- > Mitsubishi ES-X82115
- > SAE J1113-2
- > Tata TST/TS/WI/257
- > VW 80300
- > VW 80303


CN 200N1 - SINGLE-BOX TRANSFORMER ASSEMBLY FOR LF CONDUCTED IMMUNITY TESTING

The CN 200N1 is a standalone coupling network unifying two audio transformers being individually configurable for various test requirements (e.g. Ford FMC1278, German Lloyd GL VI-7-2 and SAE J1113-2). The CN 200N1 is used to apply the test signals to the lines under test via an audio transformer to perform ripple voltage tests and continuous or transient conducted immunity tests.

HIGHLIGHTS

- > **One-box transformer and 0.5 ohm load assembly**
- > **Frequency response 10 Hz to 250 kHz**
- > **Secondary saturation 50 A per transformer**
- > **Audio power 2 x 200 W**
- > **Freely configurable on primary/secondary; serial, parallel, single**
- > **Turns ratio 2:1 step down**
- > **Built-in non-inductive load resistor 0.5 ohm, 250 W**

APPLICATION AREAS

-  AUTOMOTIVE
-  MILITARY
-  AVIONICS

TECHNICAL DETAILS

TECHNICAL DETAILS

CHARACTERISTICS AUDIO ISOLATION TRANSFORMERS

Frequency response	10 Hz - 250 kHz
Audio power	200 W
Secondary saturation	Max. 50 A AC or DC
Turns ratio	2:1 step down

TRANSFORMER CONFIGURATION

Primary configuration	Single, series or parallel connection
Secondary configuration	Single or parallel (with 0.5 ohm, 250 W load)

CONNECTORS


Primary connectors	4 mm safety lab connectors
Secondary connectors	High current safety connectors

GENERAL DATA

GENERAL DATA

Dimensions	19", 3 HU (395 mm x 449 mm x 133 mm)
Weight	Approx. 24 kg
Cooling	passive cooling
Temperature	10°C - 40°C
Rel. humidity	Max. 85%, non-condensing
Atmospheric pressure	86 kPa (860 mbar) to 106 kPa (1 060 mbar)

COMPETENCE WHEREVER YOU ARE

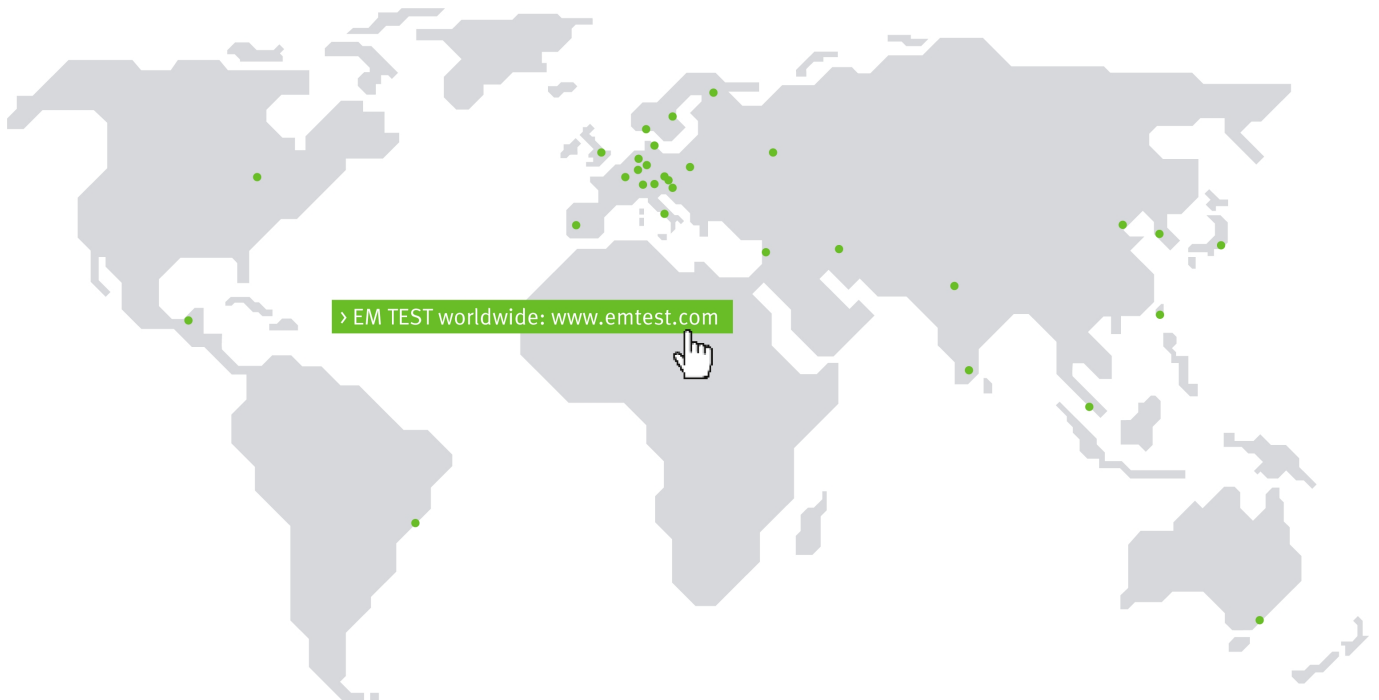

CONTACT EM TEST DIRECTLY

Switzerland

AMETEK CTS GmbH > Sternenhofstraße 15 > 4153 Reinach > Switzerland
 Phone +41 (0)61 204 41 11 > Fax +41 (0)61 204 41 00
 Internet: www.ametek-cts.com > E-mail: sales.conducted.cts@ametek.com

Germany

AMETEK CTS Europe GmbH > Customer Care Center EMEA > Lünener Straße 211
 > 59174 Kamen > Germany
 Phone +49 (0) 2307 26070-0 > Fax +49 (0) 2307 17050
 Internet: www.ametek-cts.com > E-mail: info.cts.de@ametek.com

Poland

AMETEK CTS Europe GmbH > Biuro w Polsce > ul. Twarda 44 > 00-831 Warsaw > Poland
 Phone +48 (0) 518 643 12
 Internet: www.ametek-cts.com > E-mail: Infopolska.cts@ametek.com

USA / Canada

AMETEK CTS US > 52 Mayfield Ave > Edison > NJ 08837 > USA
 Phone +1 732 417 0501
 Internet: www.ametek-cts.com > E-mail: usasales.cts@ametek.com

P.R. China

E & S Test Technology Limited > Rm 913, Leftbank >
 No. 68 Bei Si Huan Xi Lu > Haidian District > Beijing 100080 > P.R. China
 Phone +86 (0)10 82 67 60 27 > Fax +86 (0)10 82 67 62 38
 Internet: www.emtest.com > E-mail: info@emtest.com.cn

Republic of Korea

EM TEST Korea Limited > #405 > WooYeon Plaza > #986-8 > YoungDeok-dong >
 Giheung-gu > Yongin-si > Gyeonggi-do > Korea
 Phone +82 (31) 216 8616 > Fax +82 (31) 216 8616
 Internet: www.emtest.co.kr > E-mail: sales@emtest.co.kr

Singapore

AMETEK Singapore Pte. Ltd > No. 43 Changi South Avenue 2 > 04-01 Singapore
 48164
 Internet: www.ametek-cts.com > E-mail: singaporesales.cts@ametek.com

Great Britain

AMETEK GB > 5 Ashville Way > Molly Millars Lane > Wokingham > Berkshire
 RG41 2 PL > Great Britain
 Phone +44 845 074 0660
 Internet: www.ametek-cts.com

Information about scope of delivery, visual design and technical data correspond with the state of development at time of release. Subject to change without further notice.